

Wandcontactdoos  
Bestelnr. 5677A




- schroefklemmen
- afschakelbaar

Technische informatie

|                     |           |
|---------------------|-----------|
| Ampère              | 32 A      |
| Polen               | 5 p       |
| Voltage             | 400 V     |
| Uurstand            | 6 h       |
| Hertz               | 50-60 Hz  |
| Beschermingsgraad   | IP 67     |
| Behuizing materiaal | Kunststof |
| Gewicht             | 1188 g    |

Tekeningen

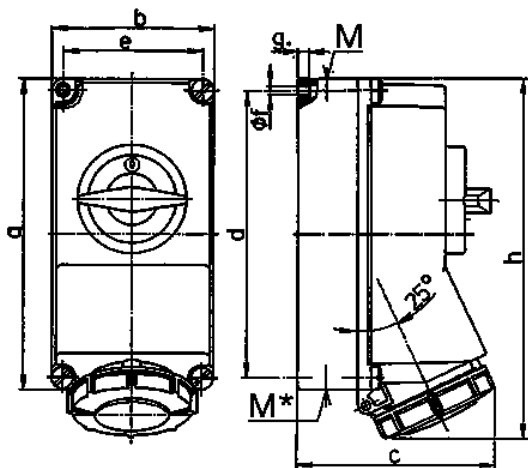

| Tekening         | Amp.  | 16           |      |      | 32           |      |     |
|------------------|-------|--------------|------|------|--------------|------|-----|
| 1 MB 207         | Polen | 3            | 4    | 5    | 3            | 4    | 5   |
| Maten in mm      | a     | 225          | 225  | 225  | 225          | 225  | 225 |
|                  | b     | 118          | 118  | 118  | 118          | 118  | 118 |
|                  | c     | 144          | 146  | 147  | 152          | 152  | 153 |
|                  | d     | 208          | 208  | 208  | 208          | 208  | 208 |
|                  | e     | 101          | 101  | 101  | 101          | 101  | 101 |
|                  | f     | 6,3          | 6,3  | 6,3  | 6,3          | 6,3  | 6,3 |
|                  | g.    | 8            | 8    | 8    | 8            | 8    | 8   |
|                  | h     | 252          | 255  | 259  | 268          | 268  | 274 |
|                  | M     | 1x25 en 1x32 |      |      | 1x25 en 1x32 |      |     |
| M*               | 2x25  | 2x25         | 2x25 | 2x25 | 2x25         | 2x25 |     |
| Kabel Ø tot mm   | 25    | 25           | 25   | 25   | 25           | 25   |     |
| Kabelaansluiting | 1,5   | 1,5          | 1,5  | 2,5  | 2,5          | 2,5  |     |
| van/tot mm²      | —4    | —4           | —4   | —10  | —10          | —10  |     |